


### Pump Data

Brand : JMS  
 Model : JEGAL 80 M

Head Rate: 31 FEET      Flow Rate: 44 GPM  
 Head Max: 41 FEET      Flow Max: 80 GPM  
 Head Min: 8 FEET      Flow Min: 5 GPM

RPM : 3450 rpm  
 Normal Power P1 : 2 HP  
 Fluid: Water  
 Fluid Temperature: at about 25 °C.  
 Density: water 1.0 kg/Dm<sup>3</sup>  
 Fluid Viscosity: 8.90 × 10<sup>-4</sup> Pa·s  
 With Float switch: NONE  
 kind of Workiny: Submersible  
 Delivery size: 1 1/2" NPT  
 Suction size: With Strainer  
 Made in : ITALY

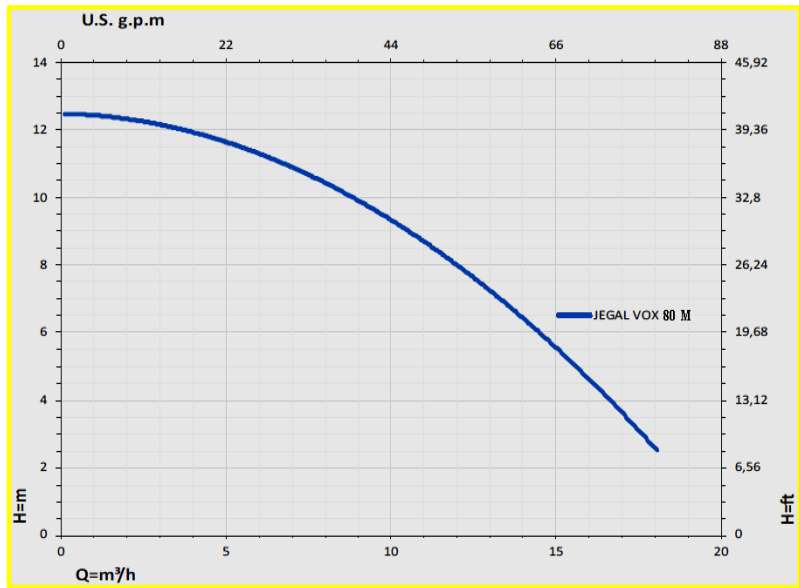

### Motor Data

Power P2:  
 Power P1: 1.5 KW  
 Phase (PH): 1  
 Rate Voltage : 115 V  
 Capacitor Need : 25      µF  
 Ferequency : 60 Hz  
 Rated Speed (rpm): 3450 rpm  
 Max. I (A): 13 A  
 Cos φ : 0.95  
 Degree of Protection (IP): IP 68  
 Safety Protection Included: F  
 length of Cable : 10 M  
 Kind of Plug : NONE  
 Ambient Temp : 40°C = 104°F

### Other Pump Data

Impeller Size (mm) : \*  
 Pressuer Rating : PN 16  
 Min. Fluid Temp : 10°C = 50°F  
 Max. Fluid Temp : 35°C = 95°F  
 Ambient Temp : 40°C = 104°F  
 Humidity % : 100%

### Special Specification

Installation status : Vertical  
 Variable frequency : NONE  
 Solid Passage 10 mm

### Materials

Pump Body : Stainless steel  
 Support: Stainless steel  
 Impeller: AISI 304  
 Mechanical Seal: Silicon Carbide / Ceramic  
 Rubber: VITON  
 Pump Shaft: AISI 316  
 Strainer: Stainless steel  
 outer cover: AISI 304  
 Motor: Stainless steel

### Shaft Seal


Type: \*  
 Stationary Part: AISI 316  
 Rotating Part: AISI 316  
 Elastomer: VITON

### Pump and Motor specification optional

With Booster System: None  
 With Complack: None  
 Special Material: None  
 Specail Voltage: None

### Protection system required

External Flout switch: YES  
 Minimum Starter: Starter SWT

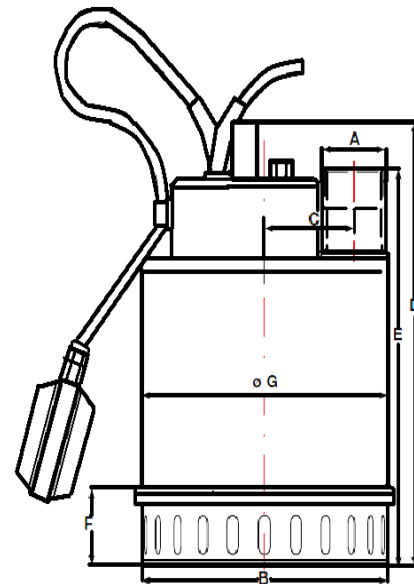

Weight : 14 Kg

Standard Approve



Applicant:

Rain Seepage Sump Pit And Catch Tank Water Pump Out  
 Garden And Vegetable-Garden Mini Flood Irrigation  
 System Rainwater Catch Tank Pump Down White Water Pump  
 Over From Reservoirs Pumping Dirty Water With Possible  
 Floating Solid Contents And Vats. Pumping Aggressive Liquid

Dimention in

mm

A 1 1/2" Inch  
 B 212.4  
 C 73  
 D 290.2  
 E 259.2  
 F 50.5  
 G 202