DATA SHEET

Three Phase Induction Motor - Squirrel Cage



: 27s (cold) 15s (hot)

: Both (CW and CCW)

: 80 K

: F-1

: Cont.(S1)

: -20°C to +40°C

: 1000 m.a.s.l.

: IC01 - ODP

: 55.0 dB(A)

: 65.9 lb

: Direct On Line

Customer :

Product line : Rolled Steel NEMA Premium Efficiency

Three-Phase

Product code: 12674796

Locked rotor time

Temperature rise

Cooling method

Starting method

Approx. weight³

Ambient temperature

Duty cycle

Altitude

Mounting

Rotation¹

Noise level²

Catalog #: 00318OT3E182T-S

Frame : 182/4T

Output : 3 HP (2.2 kW)
Poles : 4
Frequency : 60 Hz
Rated voltage : 230/460 V
Rated current : 7.72/3.86 A
L. R. Amperes : 64.8/32.4 A
LRC : 8.4x(Code K)

L. R. Amperes : 64.8/32.4 A

LRC : 8.4x(Code K)

No load current : 4.14/2.07 A

Rated speed : 1765 rpm

Slip : 1.94 %

Rated torque : 8.93 ft.lb

Locked rotor torque : 220 %

Locked rotor torque : 8.93 ft.lb

Locked rotor torque : 220 %

Breakdown torque : 330 %

Insulation class : F

Service factor : 1.15

Moment of inertia (J) : 0.3092 sq.ft.lb

50%

Design : B

Design . B

75% 100% Foundation loads

Efficiency (%) 87.5 88.5 89.5 Max. traction : 172 lb Power Factor 0.60 0.73 0.80 Max. compression : 238 lb

Bearing type : 6206 ZZ 6205 ZZ
Sealing : Without Bearing Seal Without Bearing Seal

Lubrication interval : Lubricant amount : -

Lubricant type : Mobil Polyrex EM

Notes

Output

USABLE @208V 8.54A SF 1.00 SFA 8.54A


This revision replaces and cancel the previous one, which must be eliminated.


- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.

(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	06/11/2023	1			1/1	

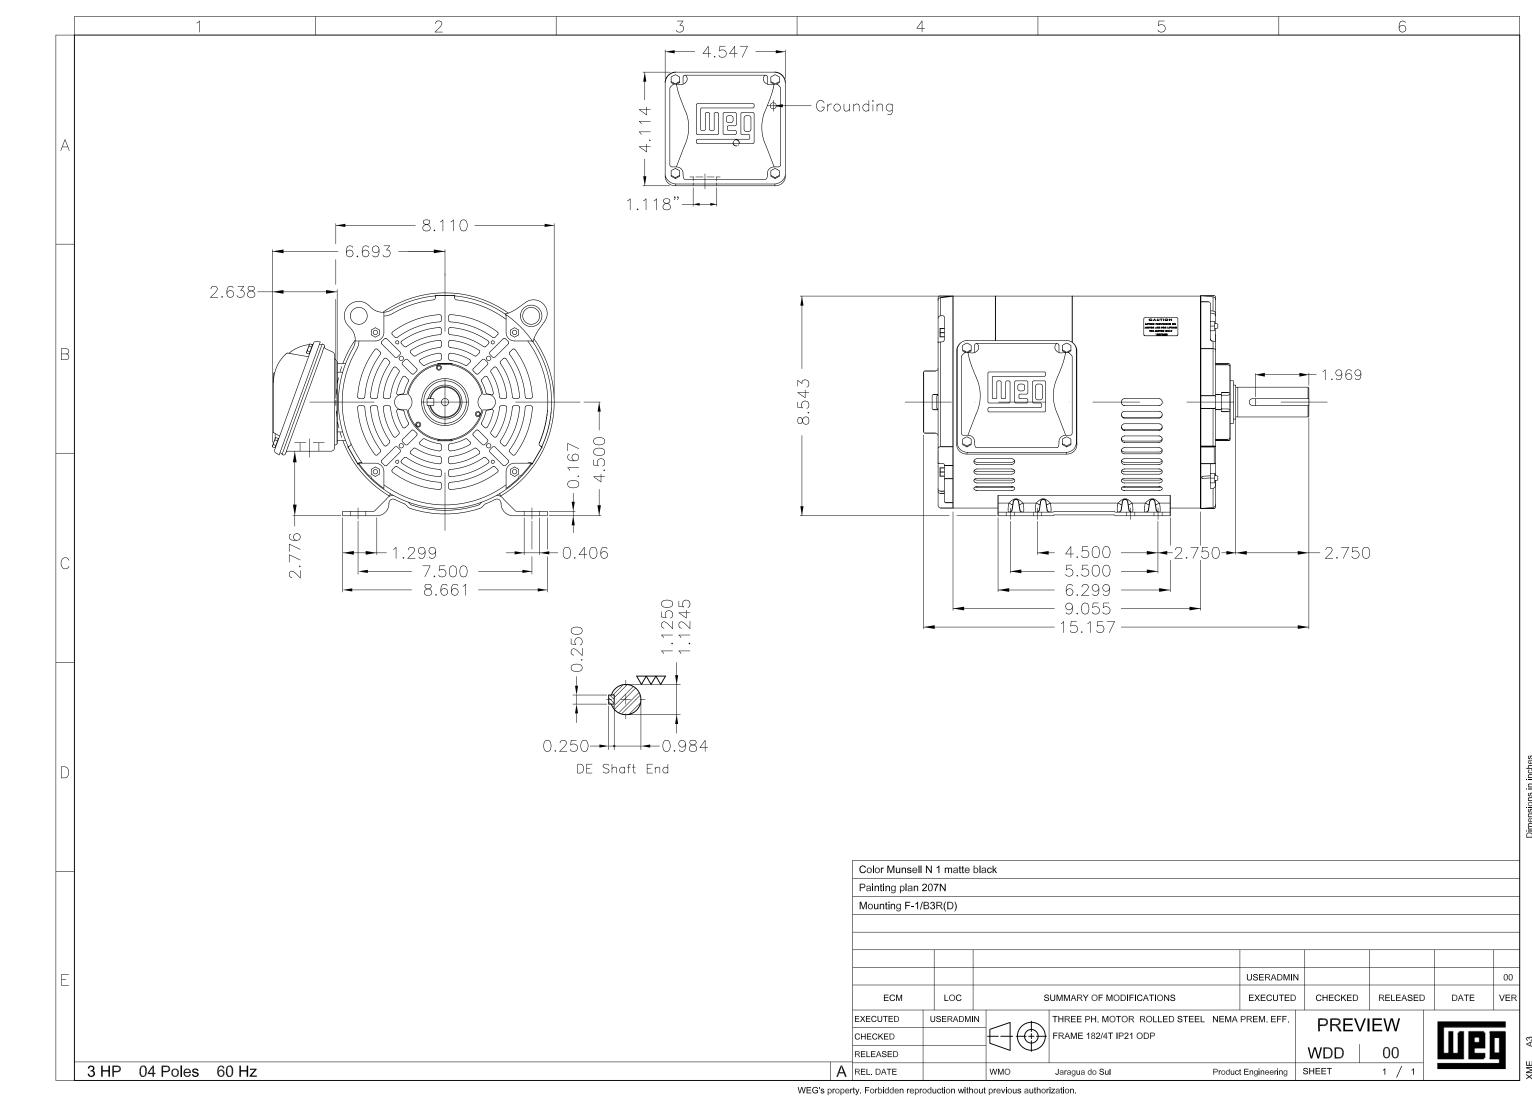

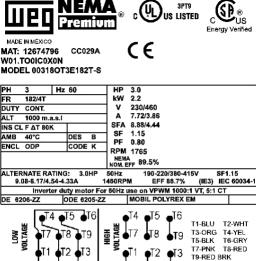

MARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical snocks. Disconnect power source before servicing unit.

conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.