
Technical Data Submersible Well Pump - SP 15003 Receiver Company name Respons. Department Person in charge Phone number Fax no E-mail address Revision no. Page: 1 Page:



Brand: Gol Pumps Model: SP 15003




Dimensions:

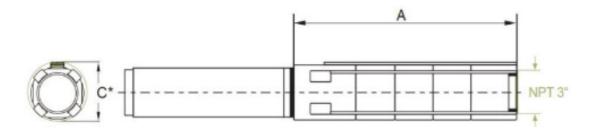

GPT	Performance Curves Submersible Well Pump - SP 1500		Revision no.	Page: 2			
	Receiver	From					
Company name							
Respons. Department							
Person in charge							
Phone number							
Fax no							
E-mail address							

	Motor		Q capacity 3450 rpm													
Pump Type	F	22	m³/h	12	15	18	21	24	27	30	33	36	39	42	45	48
-76-	KW	HP	G/min	53	66	79	92	106	119	132	145	158	172	185	198	211
SP 150- 3	4	5	Head(ft)	154	150	148	138	131	125	118	111	105	95	85	72	59

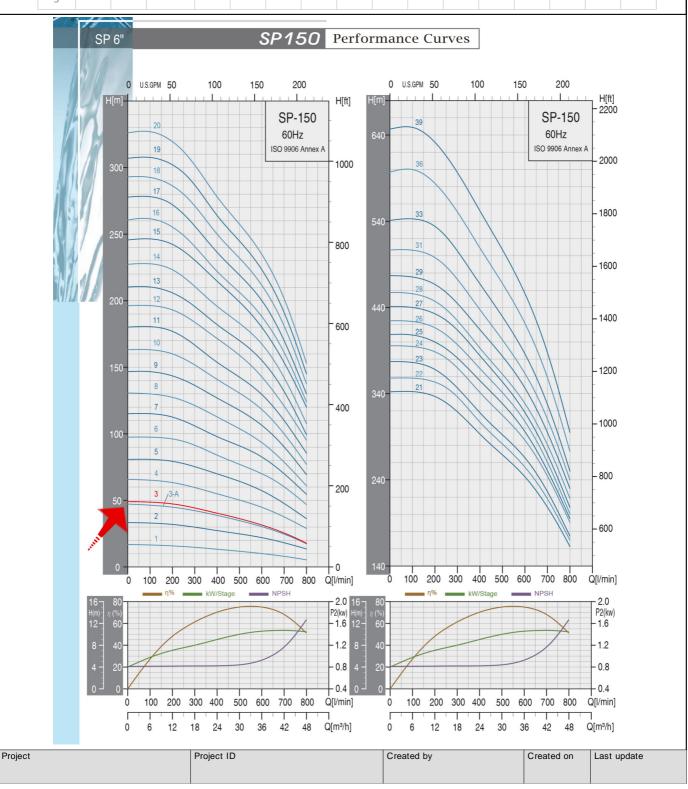

GET	Parts and Materials Submersible Well Pump - SP 15	Revision no.	Page: 3	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

General Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components Discharge SUS304 / SUS316 01 04 Valve Cone SUS304 / SUS316 04 11 Top Diffuser SUS304 / SUS316 86 SUS304 / SUS316 Diffuser 12 Impeller SUS304 / SUS316 11 18 19 Ring of Impeller SUS304 / SUS316 21 Split Cone SUS304 / SUS316 Split Cone Nut 22 SUS304 / SUS316 89 12 Spacing Washer 22 26 Carbon+Graphite+PTFE For Stop Ring 21 **Neck Ring Retainer** SUS304 / SUS316 32 34 Strainer SUS304 / SUS316 12 Suction Interconnector SUS304 / SUS316 36 26 Pump Shaft SUS431 / SUS316 37 44 Coupling SUS431 / SUS316 36 SUS304 / SUS316 47 Strap Cable Guard SUS304 / SUS316 52 37 47 86 Valve Seat SUS304+NBR / SUS316+NBR 90 Neck Ring SUS304+NBR / SUS316+NBR 88 Nut SUS304 / SUS316 91 Bearing 89 NBR 44 88 Screw 90 SUS304 / SUS316 91 Key SUS304 / SUS316 92 O-ring **NBR** *AISI 316 stainless steel pumps are available on request.

Created by

Created on

Last update

Project ID

Project