




Brand: Gol Pumps Model: SP 15007



Dimensions:

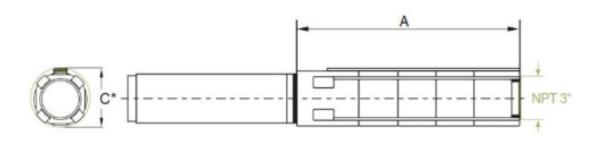


Dump Type	Motor Dia.		Dimer	Net Weight (lb)		
Pump Type	MOLOI DIa.	Α	C*	Pump Discharge	Pump	
SP 150-7	6"	37	5.6	3" NPT	37	

Project	Project ID	Created by	Created on	Last update

GPT	Performance Curves Submersible Well Pump - SP 1500	Revision no.	Page: 2	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

	Motor		Q capacity 3450 rpm													
Pump Type	Р	2	m³/h	12	15	18	21	24	27	30	33	36	39	42	45	48
.,,,,	KW	HP	G/min	53	66	79	92	106	119	132	145	158	172	185	198	211
SP 150- 7	11	15	Head(ft)	371	361	348	335	321	308	298	285	269	252	230	206	180

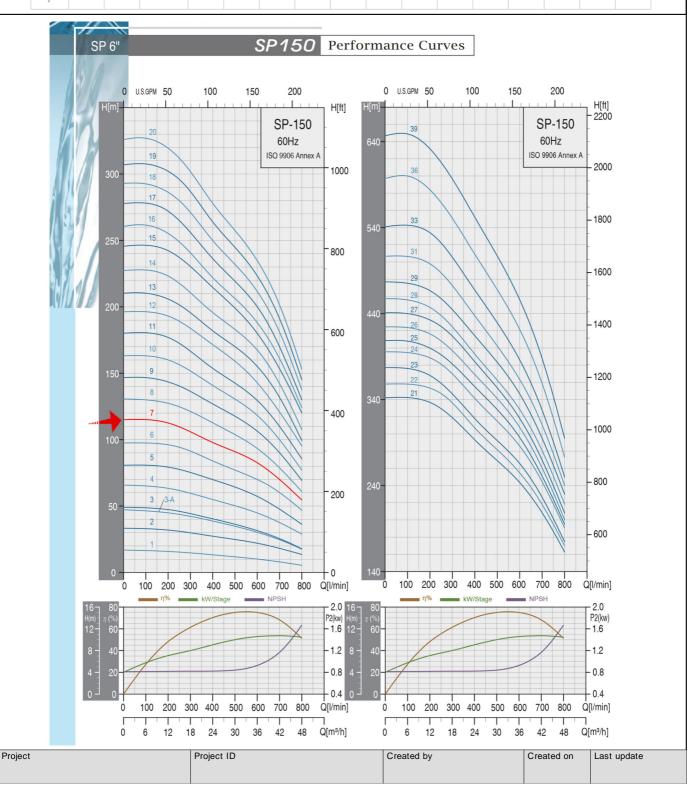

GPT	Parts and Materials Submersible Well Pump - SP 15	Revision no.	Page: 3		
	Receiver	From			
Company name					
Respons. Department					
Person in charge					
Phone number					
Fax no					
E-mail address					

General Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components Discharge SUS304 / SUS316 01 04 Valve Cone SUS304 / SUS316 04 11 Top Diffuser SUS304 / SUS316 86 SUS304 / SUS316 Diffuser 12 Impeller SUS304 / SUS316 11 18 19 Ring of Impeller SUS304 / SUS316 21 Split Cone SUS304 / SUS316 Split Cone Nut 22 SUS304 / SUS316 89 12 Spacing Washer 22 26 Carbon+Graphite+PTFE For Stop Ring 21 **Neck Ring Retainer** SUS304 / SUS316 32 34 Strainer SUS304 / SUS316 12 Suction Interconnector SUS304 / SUS316 36 26 Pump Shaft SUS431 / SUS316 37 44 Coupling SUS431 / SUS316 36 SUS304 / SUS316 47 Strap Cable Guard SUS304 / SUS316 52 37 47 86 Valve Seat SUS304+NBR / SUS316+NBR 90 Neck Ring SUS304+NBR / SUS316+NBR 88 Nut SUS304 / SUS316 91 Bearing 89 NBR 44 88 Screw 90 SUS304 / SUS316 91 Key SUS304 / SUS316 92 O-ring **NBR** *AISI 316 stainless steel pumps are available on request.

Created by

Created on

Last update

Project ID

Project