




Brand: Gol Pumps Model: SP 23003BB



Dimensions:



Dump Time	Motor Dia		Dime	Net Weight (lb)		
Pump Type	Motor Dia.	Α	C*	Pump Discharge	Pump	
SP 230-03	4"	24	5.7	3" NPT	25	


Project	Project ID	Created by	Created on	Last update	

Performance Curves Submersible Well Pump - SP 23003BB Receiver From

Revision no.	Page:
	2

Company name Respons. Department Person in charge Phone number Fax no E-mail address

	Motor		Q capacity 3450 rpm													
Pump Type	P2		m³/h	18	21	24	27	30	33	36	42	48	54	60	66	72
-71	KW	HP	G/min	79	92	106	119	132	145	158	185	211	238	364	290	317
SP 230- 03 BB	5.5	7.5	Head(ft)	12.41	12.15	11.88	11.35	11.09	10.56	10.04	9.2	8.4	7.4	6	4.2	2.6

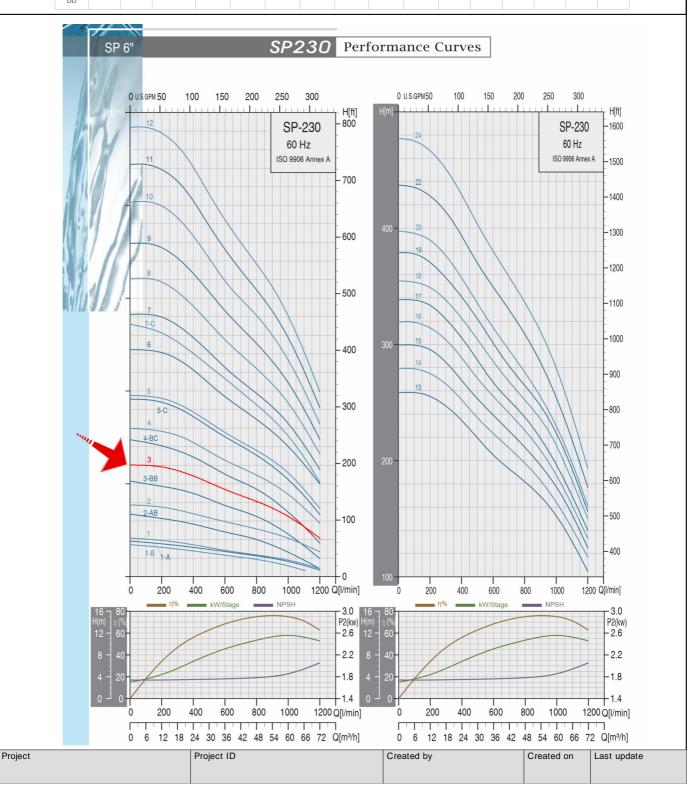

GPT	Parts and Materials Submersible Well Pump - SP 23	Revision no.	Page: 3	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

General Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components 01 Discharge SUS304 / SUS316 01 04 Valve Cone SUS304 / SUS316 Top Diffuser SUS304 / SUS316 04 11 86 Diffuser SUS304 / SUS316 12 11 18 Impeller SUS304 / SUS316 Ring of Impeller 19 SUS304 / SUS316 Split Cone 21 SUS304 / SUS316 Split Cone Nut 22 SUS304 / SUS316 12 Spacing Washer 26 Carbon+Graphite+PTFE For Stop Ring 21 SUS304 / SUS316 **Neck Ring Retainer** SUS304 / SUS316 12 Suction Interconnector SUS304 / SUS316 36 26 SUS431 / SUS316 37 Pump Shaft 44 Coupling SUS431 / SUS316 36 SUS304 / SUS316 Strap 47 Cable Guard SUS304 / SUS316 37 47 86 Valve Seat SUS304+NBR / SUS316+NBR 90 Neck Ring 87 SUS304+NBR / SUS316+NBR 52 Nut 88 SUS304 / SUS316 91 89 Bearing NBR 44 88 Screw 90 SUS304 / SUS316 91 Key SUS304 / SUS316 O-ring NBR *AISI 316 stainless steel pumps are available on request.

Created by

Created on

Last update

Project ID

Project