




Brand: Gol Pumps Model: SP 30004



Dimensions:






Pump Type	Motor Dia.		Dimer	Net Weight (lb)		
	MOLOI DIA.	Α	C*	Pump Discharge	Pump	
SP 300-04	6"	28.4	6	3" NPT	30	

Project	Project ID	Created by	Created on	Last update	

GPT	Performance Curves Submersible Well Pump - SP 3000		Revision no.	Page: 2	
	Receiver	From			
Company name					
Respons. Department					
Person in charge					
Phone number					
Fax no					
F-mail address					

	Motor		Q capacity 3450 rpm													
Pump Type	Р	2	m³/h	24	27	30	36	42	48	54	60	66	72	78	84	90
.,,,,	KW	HP	G/min	105.6	119	132	158	185	211	238	264	290	317	343	370	396
SP 300- 04	11	15	Head(ft)	253	249	243	226	213	193	180	167	154	144	128	111	92

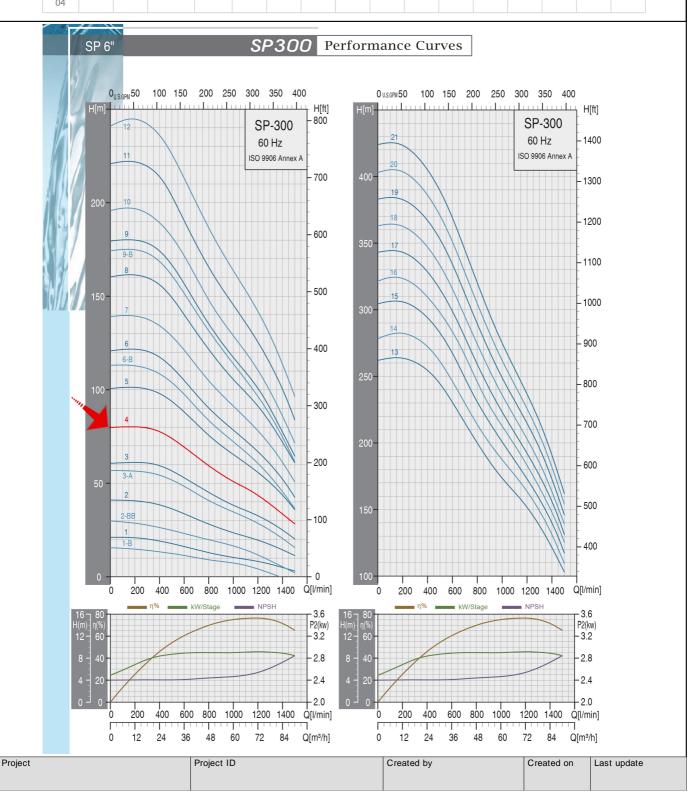

GPT CO	Parts and Materials Submersible Well Pump - SP 30	Revision no.	Page: 3	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

General Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components SUS304 / SUS316 Discharge 01 04 Valve Cone SUS304 / SUS316 04 Top Diffuser SUS304 / SUS316 11 86 Diffuser SUS304 / SUS316 12 11 18 Impeller SUS304 / SUS316 19 Ring of Impeller SUS304 / SUS316 Split Cone SUS304 / SUS316 21 Split Cone Nut 22 SUS304 / SUS316 89 Spacing Washer 26 Carbon+Graphite+PTFE For Stop Ring 21 SUS304 / SUS316 32 **Neck Ring Retainer** SUS304 / SUS316 Strainer 12 Suction Interconnector SUS304 / SUS316 36 26 Pump Shaft SUS431 / SUS316 37 Coupling SUS431 / SUS316 44 36 SUS304 / SUS316 Strap 47 Cable Guard SUS304 / SUS316 37 47 Valve Seat 86 SUS304+NBR / SUS316+NBR 90 87 **Neck Ring** SUS304+NBR / SUS316+NBR 52 88 Nut SUS304 / SUS316 91 Bearing 89 NBR 44 90 Screw SUS304 / SUS316 91 Key SUS304 / SUS316 O-ring 92 NBR *AISI 316 stainless steel pumps are available on request. Created on

Created by

Last update

Project ID

Project