




Brand: Gol Pumps Model: SP 30005



Dimensions:






Pump Type	Motor Dia		Dime	nsions (inch)	Net Weight (lb)		
	Motor Dia.	Α	C*	Pump Discharge	Pump		
SP 300-05	6"	33	6	3" NPT	35		

Project	Project ID	Created by	Created on	Last update	

GPT	Performance Curves Submersible Well Pump - SP 3000		Revision no.	Page: 2
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

Pump Type	Motor		Q capacity 3450 rpm													
	P2		m³/h	24	27	30	36	42	48	54	60	66	72	78	84	90
	KW	HP	G/min	105.6	119	132	158	185	211	238	264	290	317	343	370	396
SP 300- 05	15	20	Head(ft)	354	348	341	318	295	275	253	236	216	197	177	151	121

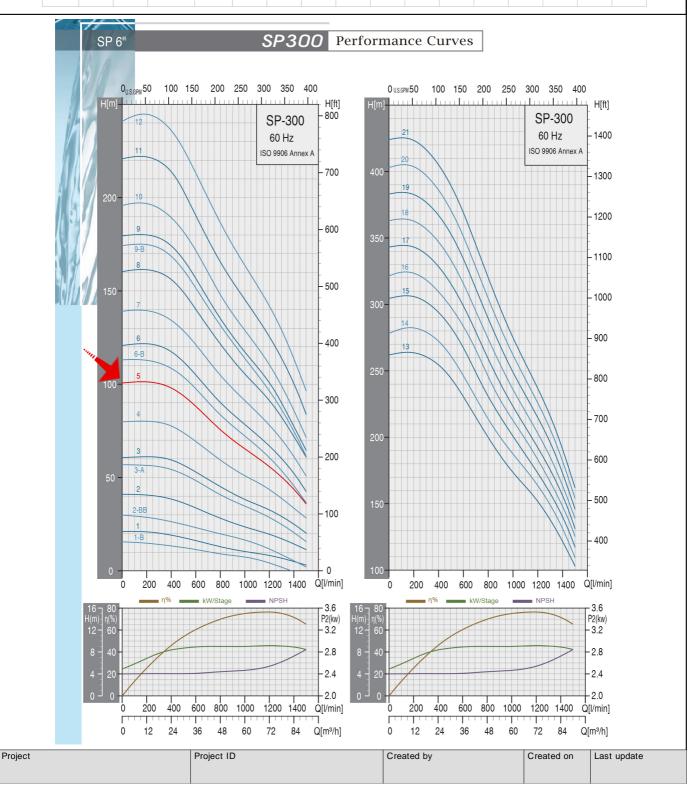

GPT	Parts and Materials Submersible Well Pump - SP 30	Revision no.	Page: 3	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

General Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components 01 Discharge SUS304 / SUS316 04 Valve Cone SUS304 / SUS316 04 Top Diffuser SUS304 / SUS316 11 86 Diffuser SUS304 / SUS316 18 Impeller SUS304 / SUS316 Ring of Impeller 19 SUS304 / SUS316 21 Split Cone SUS304 / SUS316 22 Split Cone Nut SUS304 / SUS316 12 Spacing Washer 26 22 Carbon+Graphite+PTFE For Stop Ring 21 SUS304 / SUS316 **Neck Ring Retainer** 32 SUS304 / SUS316 34 Strainer 36 Suction Interconnector SUS304 / SUS316 26 SUS431 / SUS316 Pump Shaft 37 44 Coupling SUS431 / SUS316 36 47 Strap SUS304 / SUS316 Cable Guard SUS304 / SUS316 52 37 47 Valve Seat SUS304+NBR / SUS316+NBR 86 Neck Ring SUS304+NBR / SUS316+NBR 87 52 Nut 88 SUS304 / SUS316 Bearing 89 NBR 44 Screw SUS304 / SUS316 91 Key SUS304 / SUS316 O-ring 92 NBR *AISI 316 stainless steel pumps are available on request. Project ID Created by Created on Last update

Project