



Technical Data

Submersible Well Pump - SP 30010

Revision no.

Page:

1

Receiver

From

 Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

| |
|--|
| |
| |
| |
| |
| |
| |


| |
|--|
| |
| |
| |
| |
| |
| |



Brand: Gol Pumps
Model: SP 30010



Dimensions:

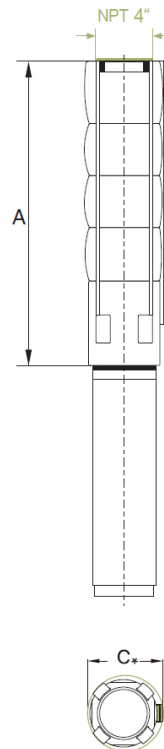

| Pump Type | Motor Dia. | Dimensions (inch) | | | Net Weight (lb) |
|-----------|------------|-------------------|----|----------------|-----------------|
| | | A | C* | Pump Discharge | Pump |
| SP 300-10 | 6" | 55 | 6 | 3" NPT | 60 |

Project

Project ID

Created by

Created on

Last update



Performance Curves

Submersible Well Pump - SP 30010


Revision no. _____
 Page: 2

Company name _____
 Respons. Department _____
 Person in charge _____
 Phone number _____
 Fax no _____
 E-mail address _____

Receiver _____

From _____

| Pump Type | Motor | | Q capacity 3450 rpm | | | | | | | | | | | | | | |
|-----------|-------|----|---------------------|-------------------|-------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | P2 | KW | HP | m ³ /h | 24 | 27 | 30 | 36 | 42 | 48 | 54 | 60 | 66 | 72 | 78 | 84 | 90 |
| | | | | | G/min | 105.6 | 119 | 132 | 158 | 185 | 211 | 238 | 264 | 290 | 317 | 343 | 370 |
| SP 300-10 | 30 | 40 | Head(ft) | 702 | 686 | 669 | 623 | 581 | 545 | 508 | 479 | 446 | 413 | 374 | 328 | 275 | |

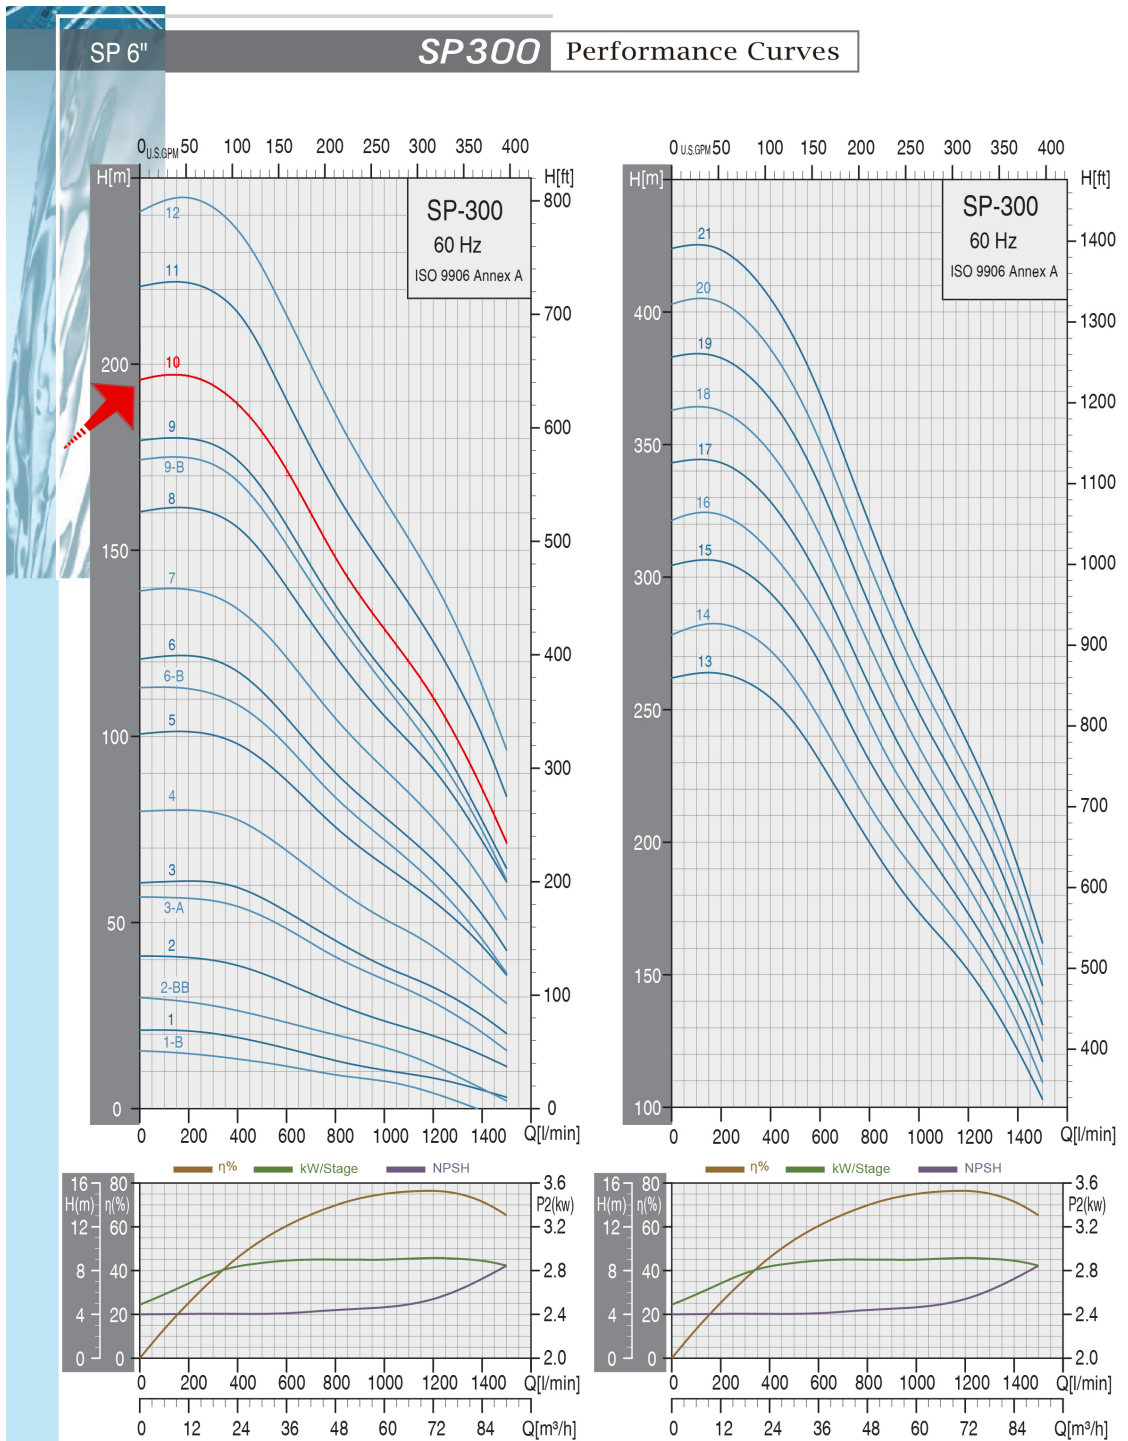

Project _____ Project ID _____ Created by _____ Created on _____ Last update _____



Parts and Materials

Submersible Well Pump - SP 30010

Revision no.

Page:
3


Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

General Data

Example: SP-90

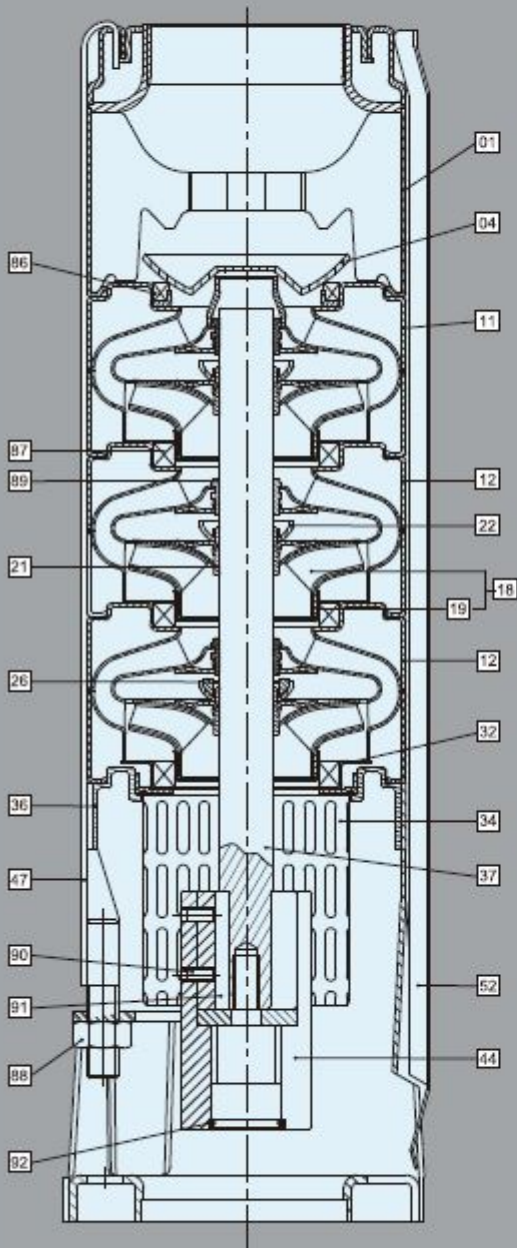

Material Specification-6" Pumps

| Pos. | Components | Standard |
|------|------------------------------|-------------------------|
| 01 | Discharge | SUS304 / SUS316 |
| 04 | Valve Cone | SUS304 / SUS316 |
| 11 | Top Diffuser | SUS304 / SUS316 |
| 12 | Diffuser | SUS304 / SUS316 |
| 18 | Impeller | SUS304 / SUS316 |
| 19 | Ring of Impeller | SUS304 / SUS316 |
| 21 | Split Cone | SUS304 / SUS316 |
| 22 | Split Cone Nut | SUS304 / SUS316 |
| 26 | Spacing Washer For Stop Ring | Carbon+Graphite+PTFE |
| 32 | Neck Ring Retainer | SUS304 / SUS316 |
| 34 | Strainer | SUS304 / SUS316 |
| 36 | Suction Interconnector | SUS304 / SUS316 |
| 37 | Pump Shaft | SUS431 / SUS316 |
| 44 | Coupling | SUS431 / SUS316 |
| 47 | Strap | SUS304 / SUS316 |
| 52 | Cable Guard | SUS304 / SUS316 |
| 86 | Valve Seat | SUS304+NBR / SUS316+NBR |
| 87 | Neck Ring | SUS304+NBR / SUS316+NBR |
| 88 | Nut | SUS304 / SUS316 |
| 89 | Bearing | NBR |
| 90 | Screw | SUS304 / SUS316 |
| 91 | Key | SUS304 / SUS316 |
| 92 | O-ring | NBR |

*AISI 316 stainless steel pumps are available on request.

Project

Project ID

Created by

Created on

Last update