




Brand: Gol Pumps Model: SP 30010



## **Dimensions:**






Pump Type	Motor Dia.		Dime	nsions (inch)	Net Weight (lb)		
	MOLOI Dia.	Α	C*	Pump Discharge	Pump		
SP 300-10	6"	55	6	3" NPT	60		

Project	Project ID	Created by	Created on	Last update	

GPT	Performance Curves Submersible Well Pump - SP 3001		Revision no.	Page: 2
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

	Motor		Q capacity 3450 rpm													
Pump Type	P	2	m³/h	24	27	30	36	42	48	54	60	66	72	78	84	90
.,,,,,	KW	HP	G/min	105.6	119	132	158	185	211	238	264	290	317	343	370	396
SP 300- 10	30	40	Head(ft)	702	686	669	623	581	545	508	479	446	413	374	328	275

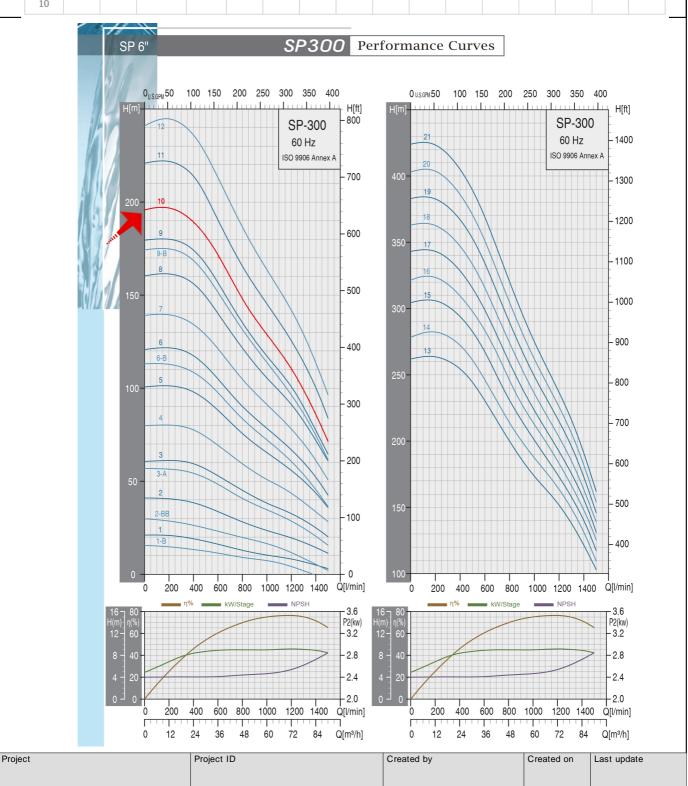

GPT	Parts and Materials Submersible Well Pump - SP 30	Revision no.	Page: 3	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

## **General** Data Example: SP-90 **Material Specification-6" Pumps** Pos. Components Standard 01 Discharge SUS304 / SUS316 Valve Cone 04 SUS304 / SUS316 04 Top Diffuser SUS304 / SUS316 11 86 Diffuser SUS304 / SUS316 12 11 18 Impeller SUS304 / SUS316 Ring of Impeller 19 SUS304 / SUS316 Split Cone 21 SUS304 / SUS316 22 Split Cone Nut SUS304 / SUS316 12 Spacing Washer Carbon+Graphite+PTFE 26 For Stop Ring 21 SUS304 / SUS316 **Neck Ring Retainer** 32 18 Strainer SUS304 / SUS316 Suction Interconnector SUS304 / SUS316 36 26 SUS431 / SUS316 37 Pump Shaft 32 Coupling SUS431 / SUS316 36 SUS304 / SUS316 Strap 47 Cable Guard SUS304 / SUS316 52 37 47 86 Valve Seat SUS304+NBR / SUS316+NBR 90 Neck Ring 87 SUS304+NBR / SUS316+NBR 52 Nut 88 SUS304 / SUS316 91 89 Bearing NBR 88 90 Screw SUS304 / SUS316 Key 91 SUS304 / SUS316 O-ring NBR \*AISI 316 stainless steel pumps are available on request.

Created by

Created on

Last update

Project ID

Project