




Brand: Gol Pumps Model: SP 30014



## **Dimensions:**






Pump Type	Motor Dia		Dime	nsions (inch)	Net Weight (lb)		
	Motor Dia.	Α	C*	Pump Discharge	Pump		
SP 300-14	6"	73	6	3" NPT	80		

Project	Project ID	Created by	Created on	Last update	

GPT	Performance Curves Submersible Well Pump - SP 3001		Revision no.	Page: 2
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
F-mail address				

	Motor		Q capacity 3450 rpm													
Pump Type	P	2	m³/h	24	27	30	36	42	48	54	60	66	72	78	84	90
,,,,,	KW	HP	G/min	105.6	119	132	158	185	211	238	264	290	317	343	370	396
SP 300- 14	37	50	Head(ft)	892	876	856	807	754	702	656	613	577	535	489	430	357

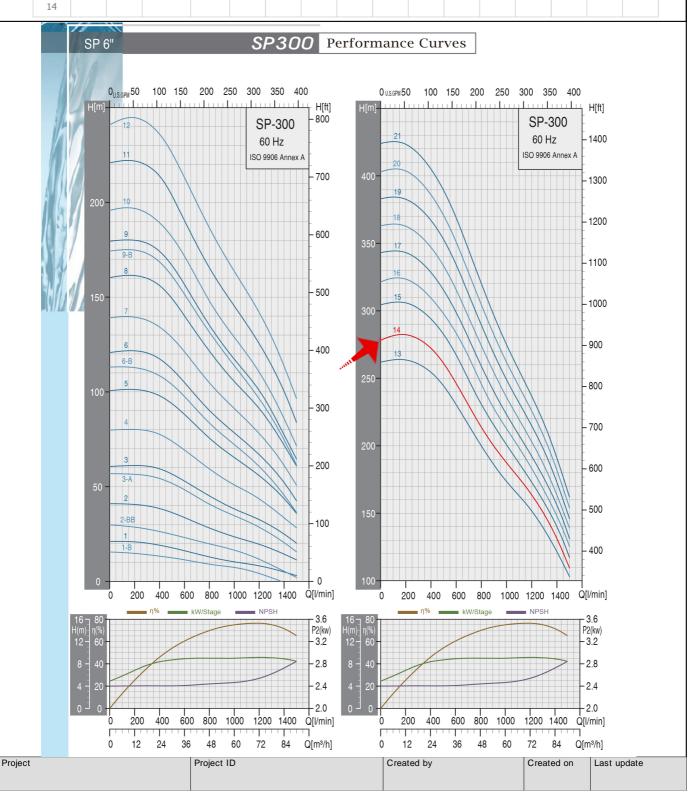

GPT	Parts and Materials Submersible Well Pump - SP 30	Revision no.	Page: 3	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

## **General** Data Example: SP-90 **Material Specification-6" Pumps** Pos. Components Standard Discharge SUS304 / SUS316 01 01 Valve Cone SUS304 / SUS316 04 Top Diffuser SUS304 / SUS316 11 86 12 Diffuser SUS304 / SUS316 18 Impeller SUS304 / SUS316 Ring of Impeller 19 SUS304 / SUS316 Split Cone 21 SUS304 / SUS316 Split Cone Nut 22 SUS304 / SUS316 12 Spacing Washer 26 Carbon+Graphite+PTFE For Stop Ring 21 SUS304 / SUS316 **Neck Ring Retainer** 32 34 Strainer SUS304 / SUS316 12 36 Suction Interconnector SUS304 / SUS316 26 SUS431 / SUS316 Pump Shaft 37 SUS431 / SUS316 44 Coupling 36 Strap SUS304 / SUS316 47 Cable Guard SUS304 / SUS316 52 37 47 Valve Seat 86 SUS304+NBR / SUS316+NBR 90 Neck Ring SUS304+NBR / SUS316+NBR 88 Nut SUS304 / SUS316 91 Bearing 89 NBR 44 90 Screw SUS304 / SUS316 91 Key SUS304 / SUS316 92 92 O-ring **NBR** \*AISI 316 stainless steel pumps are available on request.

Created by

Created on

Last update

Project ID

Project