




Brand: Gol Pumps Model: SP 9025



## **Dimensions:**

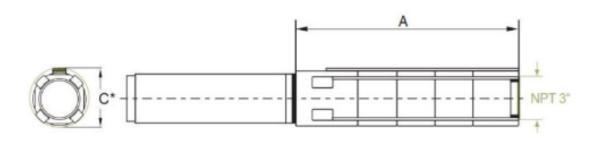


Pump Type	Motor Dia.		Dime	Net Weight (lb)	
		Α	C*	Pump Discharge	Pump
SP 90-25	6"	71	5.6	3" NPT	88

Project	Project ID	Created by	Created on	Last update

GPT	Performance Curves Submersible Well Pump - SP 9025	Revision no.	Page: 2	
	Receiver	From		
Company name				
Respons. Department				
Person in charge				
Phone number				
Fax no				
E-mail address				

	Motor		Q capacity 3450 rpm								
Pump Type	Р	2	m³/h	6	9	12	15	18	21	24	27
	KW	HP	G/min	26.4	39.6	52.8	66	79.2	92.4	105.6	118.8
SP 90- 25	22	30	Head(ft)	1286	1260	1220	1148	1056	942	797	636

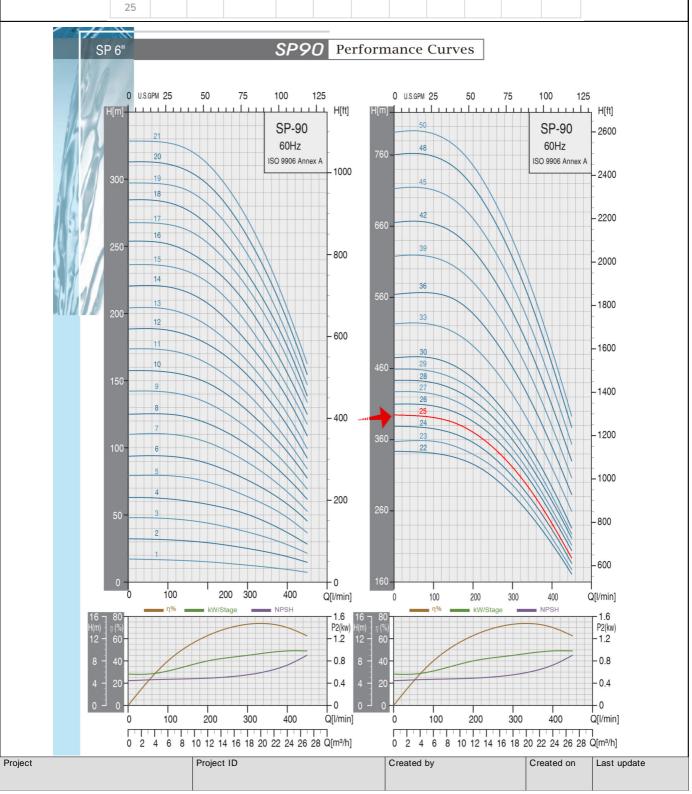

GPT	Parts and Materials Submersible Well Pump - SP 9	Revision no.	Page: 3				
	Receiver	From	rom				
Company name							
Respons. Department							
Person in charge							
Phone number							
Fax no							
E-mail address							

## **General** Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components Discharge SUS304 / SUS316 01 04 Valve Cone SUS304 / SUS316 04 11 Top Diffuser SUS304 / SUS316 86 SUS304 / SUS316 Diffuser 12 Impeller SUS304 / SUS316 11 18 19 Ring of Impeller SUS304 / SUS316 21 Split Cone SUS304 / SUS316 Split Cone Nut 22 SUS304 / SUS316 89 12 Spacing Washer 22 26 Carbon+Graphite+PTFE For Stop Ring 21 **Neck Ring Retainer** SUS304 / SUS316 32 34 Strainer SUS304 / SUS316 12 Suction Interconnector SUS304 / SUS316 36 26 Pump Shaft SUS431 / SUS316 37 44 Coupling SUS431 / SUS316 36 SUS304 / SUS316 47 Strap Cable Guard SUS304 / SUS316 52 37 47 86 Valve Seat SUS304+NBR / SUS316+NBR 90 Neck Ring SUS304+NBR / SUS316+NBR 88 Nut SUS304 / SUS316 91 Bearing 89 NBR 44 88 Screw 90 SUS304 / SUS316 91 Key SUS304 / SUS316 92 O-ring **NBR** \*AISI 316 stainless steel pumps are available on request. Created on

Created by

Last update

Project ID

Project