




Brand: Gol Pumps Model: SP 9029



Dimensions:

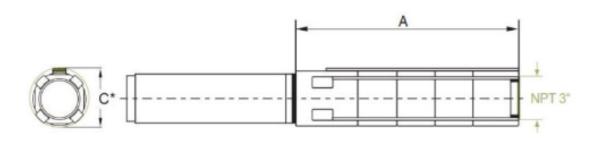


| Pump Type | Motor Dia. | | Dime | Net Weight (lb) | |
|-----------|------------|----|------|-----------------|------|
| | | Α | C* | Pump Discharge | Pump |
| SP 90-29 | 6" | 80 | 5.6 | 3" NPT | 100 |

| Project | Project ID | Created by | Created on | Last update |
|---------|------------|------------|------------|-------------|
| | | | | |

| GPT | Performance Curves Submersible Well Pump - SP 9029 | | Revision no. | Page: 2 |
|---------------------|--|------|--------------|------------|
| | Receiver | From | | |
| Company name | | | | |
| Respons. Department | | | | |
| Person in charge | | | | |
| Phone number | | | | |
| Fax no | | | | |
| E-mail address | | | | |

| | | Motor | | Q capacity 3450 rpm | | | | | | | | |
|-----------------|----|-------|----------|---------------------|------|------|------|------|------|-------|-------|--|
| Pump Type | F | 2 | m³/h | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27 | |
| | KW | HP | G/min | 26.4 | 39.6 | 52.8 | 66 | 79.2 | 92.4 | 105.6 | 118.8 | |
| SP 90- 29 | 30 | 40 | Head(ft) | 1496 | 1463 | 1410 | 1332 | 1223 | 1085 | 928 | 748 | |

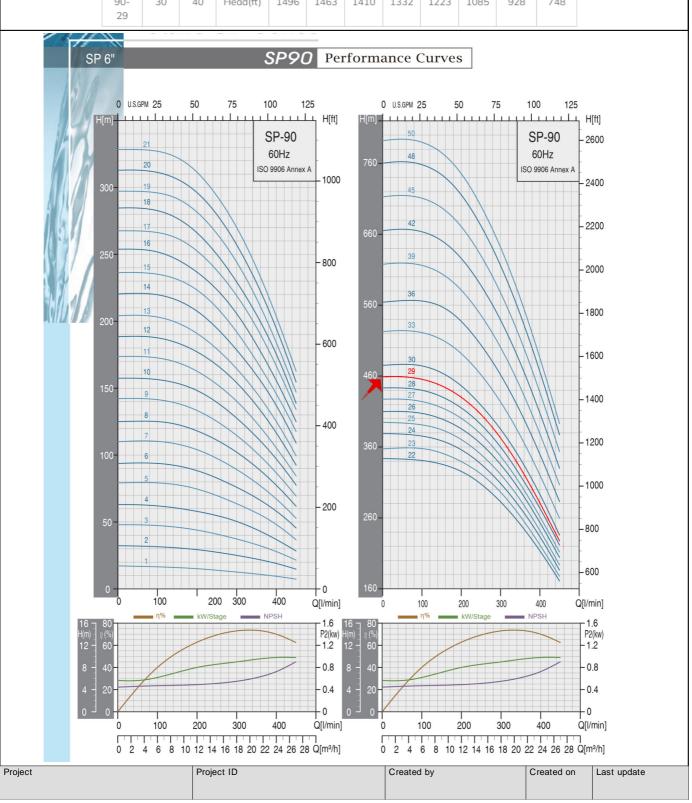

| GPT | Parts and Materials Submersible Well Pump - SP 90 | Revision no. | Page: 3 | | |
|---------------------|---|--------------|------------|--|--|
| | Receiver | From | | | |
| Company name | | | | | |
| Respons. Department | | | | | |
| Person in charge | | | | | |
| Phone number | | | | | |
| Fax no | | | | | |
| E-mail address | | | | | |

General Data Example: SP-90 **Material Specification-6" Pumps** Standard Pos. Components Discharge SUS304 / SUS316 01 04 Valve Cone SUS304 / SUS316 04 11 Top Diffuser SUS304 / SUS316 86 SUS304 / SUS316 Diffuser 12 Impeller SUS304 / SUS316 11 18 19 Ring of Impeller SUS304 / SUS316 21 Split Cone SUS304 / SUS316 Split Cone Nut 22 SUS304 / SUS316 89 12 Spacing Washer 22 26 Carbon+Graphite+PTFE For Stop Ring 21 **Neck Ring Retainer** SUS304 / SUS316 32 34 Strainer SUS304 / SUS316 12 Suction Interconnector SUS304 / SUS316 36 26 Pump Shaft SUS431 / SUS316 37 44 Coupling SUS431 / SUS316 36 SUS304 / SUS316 47 Strap Cable Guard SUS304 / SUS316 52 37 47 86 Valve Seat SUS304+NBR / SUS316+NBR 90 Neck Ring SUS304+NBR / SUS316+NBR 88 Nut SUS304 / SUS316 91 Bearing 89 NBR 44 88 Screw 90 SUS304 / SUS316 91 Key SUS304 / SUS316 92 O-ring **NBR** *AISI 316 stainless steel pumps are available on request.

Created by

Created on

Last update

Project ID

Project