




Respons. Department Person in charge Phone number Fax no

## Parts and Materials Revision no. Submersible Well Pump - SP 110003 - SS316

Receiver

From

E-mail address

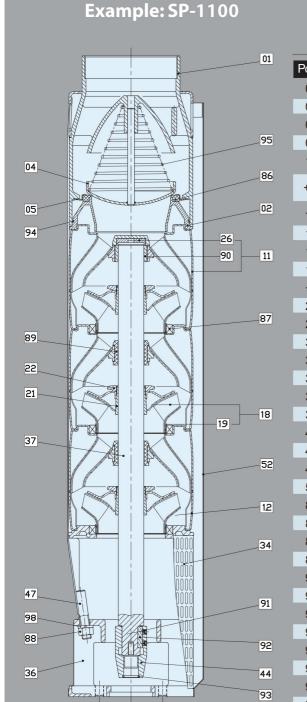

## **Material Specification-10" Pumps**

Page:

3

os.	Components	Standard
01	Discharge	SUS316
02	Lower Valve Seat Retainer	SUS316
04	Valve Cup	SUS316
05	Upper Valve Seat Retainer	SUS316
11	Upper Diffuser	SUS316
+26	Spacing Washer For Stop Ring	Carbon Fiber+MoS2+PTFE
+90	Upper Bearing	SUS316+NBR
12	Diffuser	SUS316
18	Impeller	SUS316
18	Impeller - A	SUS316
+19	Ring Of Impeller	SUS316
21	Split Cone	SUS316
22	Split Cone Nut	SUS316
34	Strainer - one lead	SUS316
34	Strainer - two leads	SUS316
36	Suction Interconnector - 6"	SUS316
36	Suction Interconnector - 8"	SUS316
37	Shaft	SUS316
44	Coupling - 6"	SUS316
44	Coupling - 8"	SUS316
47	Strap	SUS316
52	Cable Guard	SUS316
86	Valve Seat	NBR70
87	Neck Ring	PPS+NBR
88	Nut	SUS316
89	Bearing	NBR70
91	Screw - 6"	SUS316
91	Screw - 8"	SUS316
92	Key - 6"	SUS316
92	Key - 8"	SUS316
93	O-ring - 6"	NBR70
93	O-ring - 8"	NBR70
94	O-ring	NBR70
95	Spring	SUS316
98	Spring Washer	
	*AISI 316 stainless steel pump	ps are available on request.

\*AISI 316 stainless steel pumps are available on request.

Project	Project ID	Created by	Created on	Last update


		<b>ical Datasheet</b> Il Pump - SP 110003 - SS					
	Receiver	From		·			
Company name							
Respons. Department							
Person in charge							
Phone number							
Fax no							
E-mail address							
Pmax Lin	In Ia n (Eff.) %	cos (PE) r n m	Max water T in °F	Cable Cable			

Motor	Pm	nax	Un	In	la	r	n (Eff.) %	6		cos (PF)	)	r.p.m		Ma	x. water T ir	۱°F	Cable	L
	HP	ĸw	V	А	А	2/4	3/4	4/4	2/4	3/4	4/4	n	N	PVC	PE2+PA	нт	(inch^2)	ft
9E12EVC	125	93	440	165	660	87.1	87.8	87.6	0.67	0.78	0.84	3487	70000	86	140	167	/	8
0F125XC	3F125XC 125	33	460	158	630	87.9	88.4	88.5	0.66	0.77	0.83	3500	70000	00	140	101	(0.9)×3	8



Mater Ture	Lenght	Net weight		Case dimensions (inch)		Gross weight
Motor Type	inch	lb	А	В	С	lb
8F125XC	70	553	71	11	16	591

10" Coupling – Nema:



Project	Project ID	Created by	Created on	Last update

GPT CO	Motor Ma Submersible Well F	Pump - SP 110003 - SS316	2
	Receiver	From	
mpany name spons. Department			
rson in charge one number x no			
x no mail address			
Pos.	Qt.	Components	Material AISI 316
1	1	Sand guard	NBR 90
2	1/2	Ring nut	AISIS 316 / Wr 14401
3	2/4	Cable-press	Plastic
4	1/2	Cable-press gasket	NBR 45
5	4	Nut	AISIS 316 / Wr 14401
6	4	Washer	AISIS 316 / Wr 14401
7	1	Upper flange	AISIS 316 / Wr 14401
8	4	Screw	AISIS 316 / Wr 14401
9	1	Screw	AISIS 316 / Wr 14401
10	1	Mechanical Seal	SIC + SIC + NBR
11	4	Gasket	Paper
12	1	Upper support	AISIS 316 / Wr 14401
13	2/3/4	Seal bushing	Graphite
14	1	Stator	AISIS 316 / Wr 14401
15	3/6	Single core round cable	EPR 0.6-1 KV
16	8	Upper tension rod	AISIS 316 / Wr 14401
17	16	Gasket	/
18	16	Washer	AISIS 316 / Wr 14401
19	16	Nut	AISIS 316 / Wr 14401
20	2	Washer	/
21	1	Plug	AISIS 316 / Wr 14401
21A	1	Valve	AISIS 316 / Wr 14401
22	1	Rotor	Duplex / Wr 14462
23	1	Кеу	Iron
24	1	Lower support	AISIS 316 / Wr 14401
25	1	Striker disk	Plastic
26	1	Screw	AISIS 304 / Wr 14301
oject	Project ID	Created by	Created on Last update

GPT	Motor Technic Submersible Well	al Datasheet Pump - SP 110003 - SS316	evision no. Page: 2
	Receiver	From	
Company name Respons. Department Person in charge Phone number Fax no E-mail address			
27	4	Thrust disk	Steel/Graphite/Resin
28	1	Seeger ring	Iron
29	1	Thrust sliding	AISIS 420
30	6	Base	AISIS 316 / Wr 14401
31	1	Screw	Iron
32	1	Nut	Iron
33	1	Internal over	AISIS 304 / Wr 14301
34	1	Membrane	NBR 60
35	1	External cover	AISIS 316 / Wr 14401
36	4	Screw	AISIS 316 / Wr 14401
37	8	Lower tension rod	AISIS 316 / Wr 14401
38	1	Complete thrust bearing	1
39	1	Protective ring	PA 66

Project	Project ID	Created by	Created on	Last update