
| GPT | Technical Data Submersible Well Pump - SP 500 | 10 - SS316 | Revision no. | Page: 1 |
|---------------------|---|------------|--------------|------------|
| | Receiver | From | | |
| Company name | | | | |
| Respons. Department | | | | |
| Person in charge | | | | |
| Phone number | | | | |
| Fax no | | | | |
| E-mail address | | | | |



Brand: Gol Pumps Model: SP 50010



Dimensions:




| Dump Type | Motor Dia. | | Dime | nsions (inch) | Net Weight (lb) |
|-----------|------------|----|------|----------------|-----------------|
| Pump Type | MOLOI DIA. | Α | C* | Pump Discharge | Pump |
| SP 500-10 | 8″ | 70 | 8 | 5" NPT | 130 |


| Project | Project ID | Created by | Created on | Last update |
|---------|------------|------------|------------|-------------|
| | | | | |

Performance Curves Submersible Well Pump - SP 50010 - SS316 Receiver Company name Respons. Department Person in charge Phone number Fax no E-mail address Revision no. Page: 2 Page: 2

| | Mo | otor | | | | | | Qc | apacity 3 | 3450 rpm | | | | | | |
|------------------|----|------|----------|-----|-----|-----|-----|-----|-----------|----------|-----|-----|-----|-----|-----|--|
| Pump Type | Р | 2 | m³/h | 18 | 30 | 42 | 54 | 66 | 78 | 90 | 102 | 114 | 126 | 138 | 150 | |
| 7,6-2 | KW | HP | G/min | 79 | 132 | 185 | 238 | 290 | 343 | 396 | 449 | 502 | 555 | 607 | 660 | |
| SP 500- 10 | 66 | 90 | Head(ft) | 991 | 968 | 922 | 869 | 807 | 745 | 689 | 636 | 590 | 541 | 459 | 338 | |

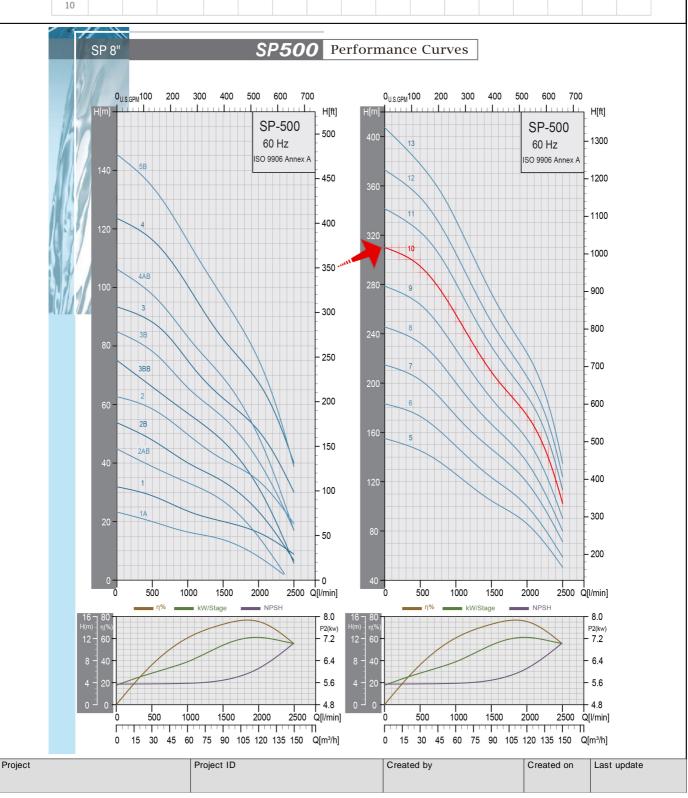

| GPT | Parts and Materials Submersible Well Pump - SP 50 | | Revision no. | Page: 3 |
|---------------------|---|------|--------------|------------|
| | Receiver | From | | |
| Company name | | | | |
| Respons. Department | | | | |
| Person in charge | | | | |
| Phone number | | | | |
| Fax no | | | | |
| E-mail address | | | | |

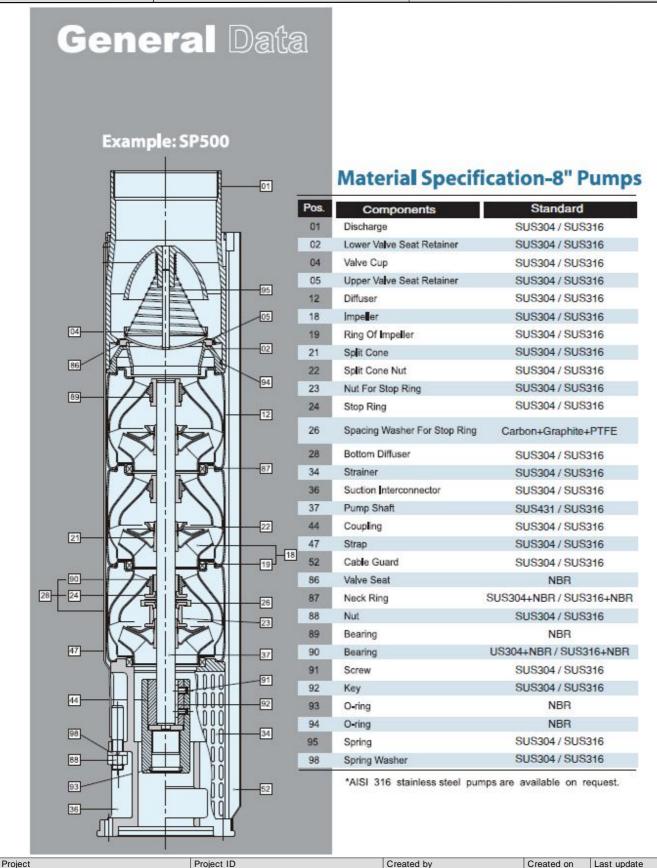



Motor Technical Datasheet Submersible Well Pump - SP 50010 - SS316

| vision no. | Page: |
|------------|-------|
| | 2 |

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

| Receiver | From |
|----------|------|
| | |
| | |
| | |
| | |
| | |
| | |

| Motor | Pn | nax | Un | ln | la | n | (Eff.) ⁹ | % | | cos (PF) | | r.p.m | | Ma | x. water T ii | n°F | Cable | Cable L |
|--------|----|-----|-----|-----|-----|------|---------------------|------|------|----------|------|-------|----------|--------|---------------|-----|----------|------------|
| | HP | KW | V | Α | Α | 2/4 | 3/4 | 4/4 | 2/4 | 3/4 | 4/4 | n | N | PVC | PE2+PA | нт | (inch^2) | ft |
| 8F90XC | 90 | 66 | 440 | 119 | 476 | 86.2 | 87 | 86.2 | 0.72 | 0.82 | 0.85 | 3473 | 60000 | 96 | 140 | 167 | / | 11 |
| 8F9UXC | 90 | 00 | 460 | 114 | 456 | 87 | 88 | 87.1 | 0.72 | 0.81 | 0.84 | 3483 | 60000 86 | 000 86 | 140 | 107 | (0.6)x3 | 11 |




| Motor Type | Lenght | Net weight | | Case dimensions (inch) | | | | |
|------------|--------|------------|----|------------------------|----|-----|--|--|
| Motor Type | inch | lb | A | В | С | lb | | |
| 8F90XC | 60 | 463 | 61 | 11 | 16 | 496 | | |

10" Coupling - Nema:

Motore 8" · Attacco 8" - NEMA

8" Motor · 8" Coupling - NEMA Moteur 8" · Accouplement 8" - NEMA Motor 8" · Acoples 8" - NEMA







Motor Material Submersible Well Pump - SP 50010 - SS316

| Revision no. | Page: |
|--------------|-------|
| | 2 |
| | |

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

| Receiver | From |
|----------|------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |

| Pos. | Qt. | Components | Material AISI 316 |
|------|-------|-------------------------|----------------------|
| 1 | 1 | Sand guard | NBR 90 |
| 2 | 1/2 | Ring nut | AISIS 316 / Wr 14401 |
| 3 | 2/4 | Cable-press | Plastic |
| 4 | 1/2 | Cable-press gasket | NBR 45 |
| 5 | 4 | Nut | AISIS 316 / Wr 14401 |
| 6 | 4 | Washer | AISIS 316 / Wr 14401 |
| 7 | 1 | Upper flange | AISIS 316 / Wr 14401 |
| 8 | 4 | Screw | AISIS 316 / Wr 14401 |
| 9 | 1 | Screw | AISIS 316 / Wr 14401 |
| 10 | 1 | Mechanical Seal | SIC + SIC + NBR |
| 11 | 4 | Gasket | Paper |
| 12 | 1 | Upper support | AISIS 316 / Wr 14401 |
| 13 | 2/3/4 | Seal bushing | Graphite |
| 14 | 1 | Stator | AISIS 316 / Wr 14401 |
| 15 | 3/6 | Single core round cable | EPR 0.6-1 KV |
| 16 | 8 | Upper tension rod | AISIS 316 / Wr 14401 |
| 17 | 16 | Gasket | / |
| 18 | 16 | Washer | AISIS 316 / Wr 14401 |
| 19 | 16 | Nut | AISIS 316 / Wr 14401 |
| 20 | 2 | Washer | 1 |
| 21 | 1 | Plug | AISIS 316 / Wr 14401 |
| 21A | 1 | Valve | AISIS 316 / Wr 14401 |
| 22 | 1 | Rotor | Duplex / Wr 14462 |
| 23 | 1 | Key | Iron |
| 24 | 1 | Lower support | AISIS 316 / Wr 14401 |
| 25 | 1 | Striker disk | Plastic |
| 26 | 1 | Screw | AISIS 304 / Wr 14301 |

| Project | Project ID | Created by | Created on | Last update |
|---------|------------|------------|------------|-------------|
| | | | | |

Motor Technical Datasheet Submersible Well Pump - SP 50010 - SS316 Receiver From Company name Respons. Department

Person in charge Phone number Fax no E-mail address Revision no. Page: 2

| Receiver | From | |
|----------|------|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| 27 | 4 | Thrust disk | Steel/Graphite/Resin | |
|----|---|-------------------------|--|--|
| 28 | 1 | Seeger ring | Iron | |
| 29 | 1 | Thrust sliding | AISIS 420 | |
| 30 | 6 | Base | AISIS 316 / Wr 14401 | |
| 31 | 1 | Screw | Iron | |
| 32 | 1 | Nut | Iron | |
| 33 | 1 | Internal over | AISIS 304 / Wr 14301 NBR 60 AISIS 316 / Wr 14401 | |
| 34 | 1 | Membrane | | |
| 35 | 1 | External cover | | |
| 36 | 4 | Screw | AISIS 316 / Wr 14401 | |
| 37 | 8 | Lower tension rod | AISIS 316 / Wr 14401 | |
| 38 | 1 | Complete thrust bearing | 1 | |
| 39 | 1 | Protective ring | PA 66 | |