	Technical Data Vertical Multistage - SBN 120-3 3PH NEMA	Revision no.	Page: 1

	Receiver	From
Company name		
Respons. Department		
Person in charge		
Phone number		
Fax no		
E-mail address		




Brand: G.P.T.CO

Model: SBN 120-3 3PH

Max. Operating Pressure		Stage	Max. inlet Pressures
Stage	flange(ANSI)		
SBN 120		SBN 120	
(1-1)-(5-2)	435 Psi	(2-2)-3	217 Psi

Dimensions:

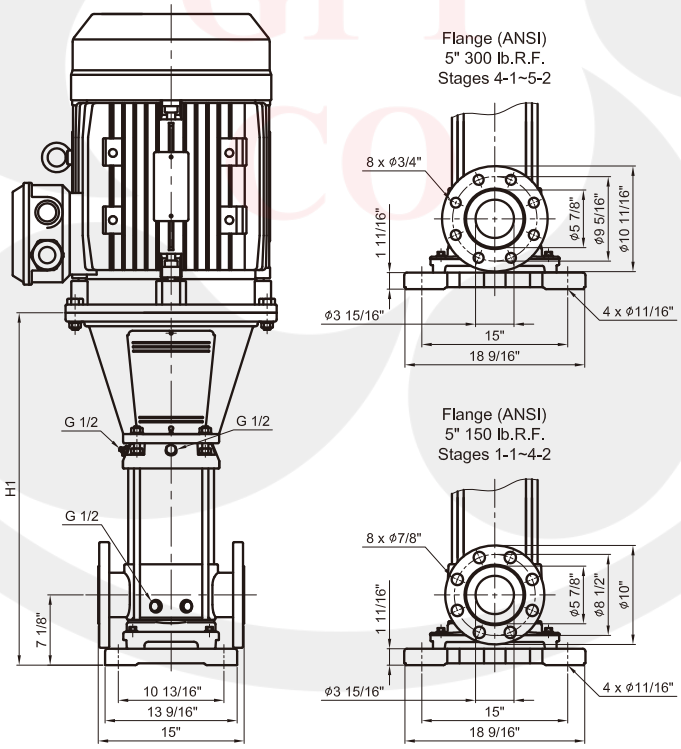

Pump type	Recommend motor of HP			SBN		
				NEMA Frame	Dimension[inch]	Weights[lbs]
	P2				ANSI flange	ANSI flange
	[HP]	[kW]	[PH]		H1	
SBN 120-3	75	55	3	365TSC	45.67	331.4


Project	Project ID	Created by	Created on	Last update

Technical Data

Vertical Multistage - SBN 120-3 3PH NEMA

Revision no.	Page:
	2


	Receiver	From
Company name		
Respons. Department		
Person in charge		
Phone number		
Fax no		
E-mail address		

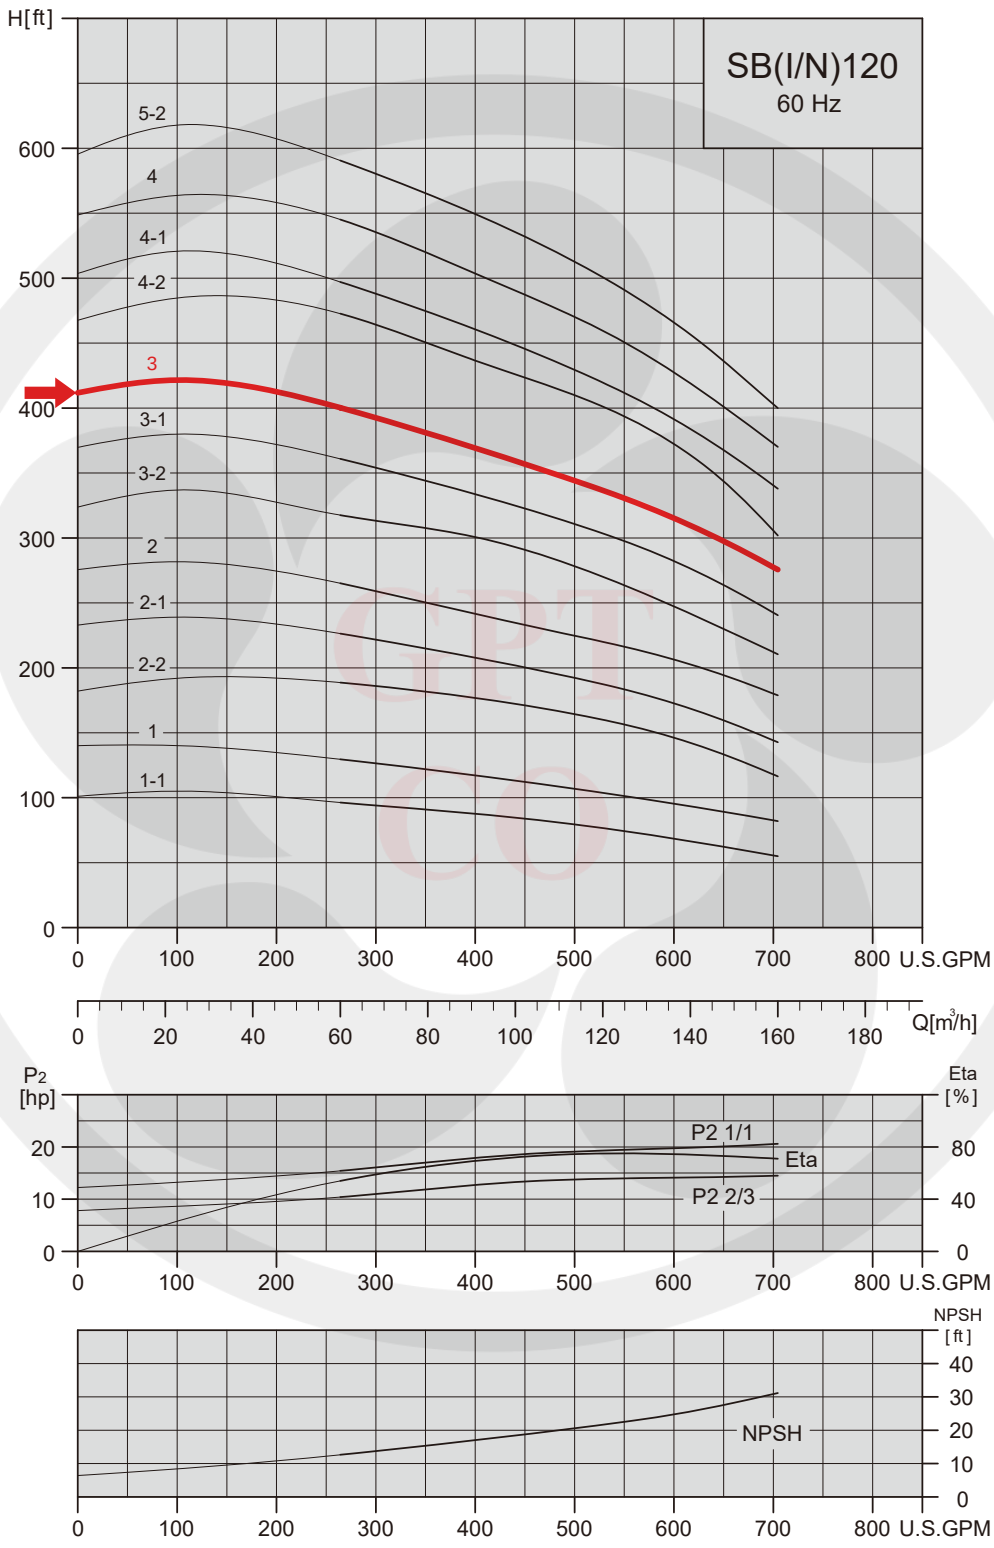

Project	Project ID	Created by	Created on	Last update

	Receiver	From
Company name		
Respons. Department		
Person in charge		
Phone number		
Fax no		
E-mail address		

SBI/N-120,150

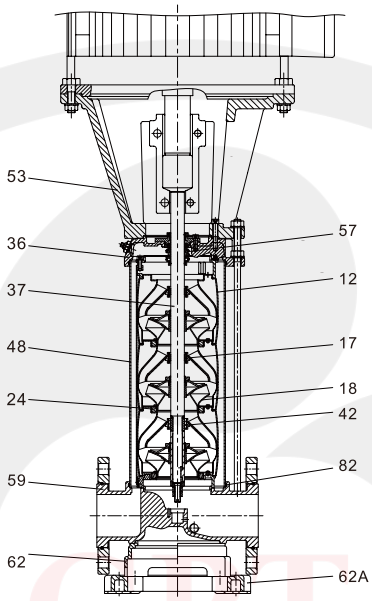

Construction

Pos.	Name	Material	SBN 120,150
			Standard
			USA
36	Pump head	Cast Iron	N/A
		Stainless steel	AISI 316
53	Motor Bracket (15HP~60HP)	Cast Iron	ASTM 35B
	Motor Bracket (75HP~100HP)	Cast Iron	ASTM 65-45-12
17	Bearing ring	PTFE	
18	Impeller	Stainless steel	AISI 316
37	Shaft	Stainless steel	AISI 316
48	Outer sleeve	Stainless steel	AISI 316
82	O-ring for outer sleeve	EPDM	
12	Chamber	Stainless steel	AISI 316
24	Neck ring	PTFE	
59	Base	Cast Iron	N/A
		Stainless steel	AISI 316
62	Base plate	Cast Iron	ASTM 65-45-12
62A	Base plate	Cast Iron	ASTM 65-45-12
57	Mechanical seal	Cartridge type	
42	Bottom bearing ring	SiC / SiC	

Project	Project ID	Created by	Created on	Last update

DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	:

Product line	: W40 NEMA Premium Efficiency (Derating)
Product code	: 14272522

Frame	: 364/5T	Locked rotor time	: 19 s (hot) 34 s (cold)
Output	: 75 HP (55 kW)	Temperature rise[4]	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l
Rated current	: 170/84.8 A	Protection degree	: IP23
L. R. Amperes	: 1119/559 A	Cooling method	: IC01 - ODP
LRC	: 6.6 Code G	Mounting	: B34R(D)
No load current	: 46.0/23.0 A	Rotation[1]	: Both
Rated speed	: 3555 rpm	Noise level[2]	: 82 dB(A)
Slip	: 1.25 %	Starting method	: Direct On Line
Rated torque	: 111 ft.lb	Approx. weight[3]	: 736 lb
Locked rotor torque	: 200 %	Design	: B
Pull up torque	: 170 %		
Breakdown torque	: 220 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 6.4 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	91.7	93.0	93.6
Power Factor	0.77	0.84	0.87

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6314-C3	6212-Z-C3
Lubrication interval	14418 h	20000 h
Lubrication amount	27 g	13 g
Lubrication type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: 456 lb
Max. compression	: 1193 lb

Notes:

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
6.28	4.65	4.35	3.33	1.79	1.14	0.64

Standards

Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
Noise	: MG1 - Part 9		


This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.


These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.


Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	2026/10/20		1/1	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

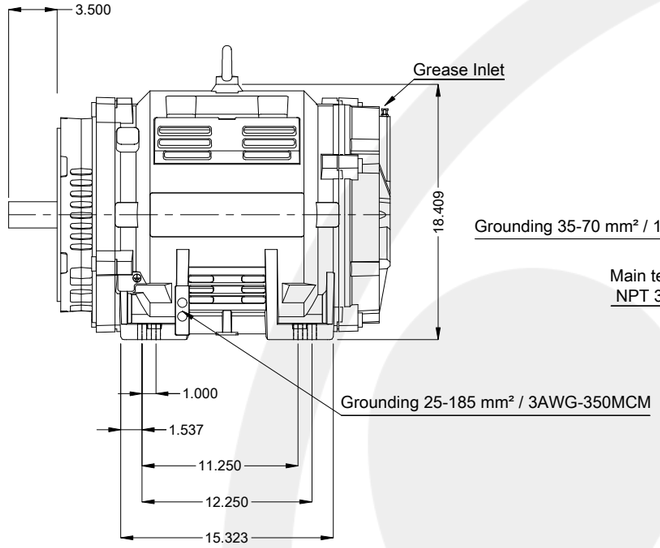


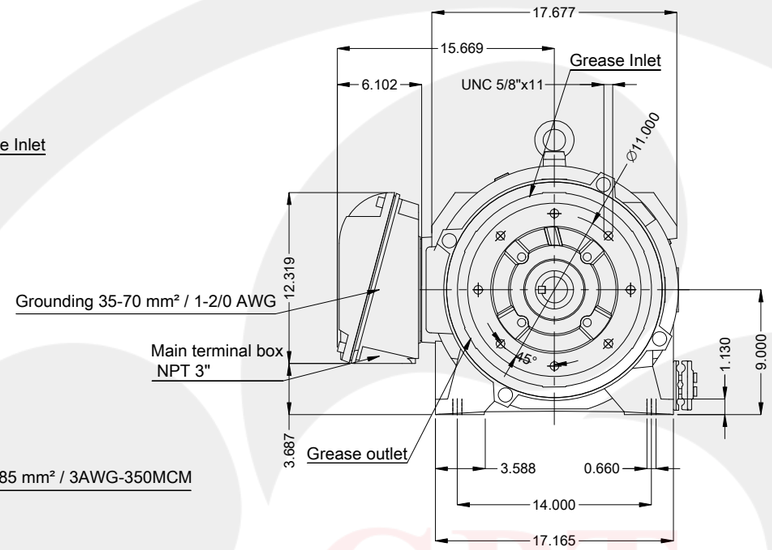

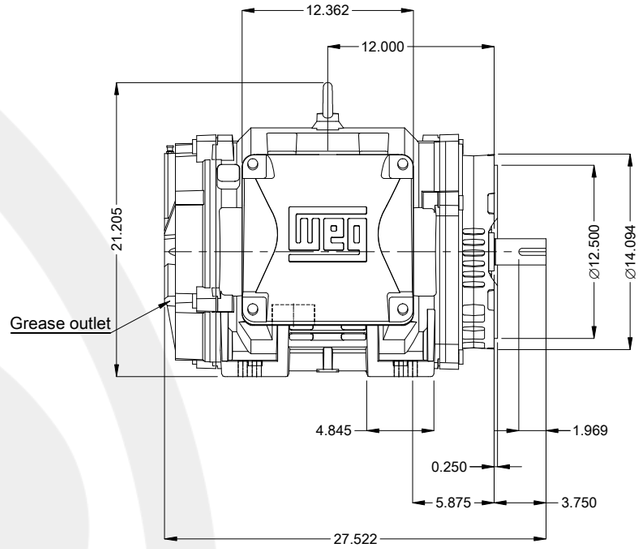

Color RAL 5009
Painting plan 203A
Mounting NEMA F-1
Mounting B34D

DE Shaft End



DUNC 3/4"-10 WEG WPR-7339

75 HP 02 Poles 60 Hz | A

Scale 1 : 11

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W40 NEMA PREM. EFF.
FRAME 364/5TSC IP23 ODP

PREVIEW
WDD 00
SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.

MADE IN BRAZIL
14272522


MODEL 07536OT3E364TSC-W40

Inverter Duty Motor
IEC 60034-1

60Hz: For use on PWM: VT 1000:1, CT 2:1, 1.00SF

Mod.TO1#FOXON
CC029A

PH3 Fr. 364/5TSC DUTY CONT. (S1) ODP(IC01) IP23 DES B(N) Code G
713lb 1000m.a.s.l. INS cl. F DT 80K AMB 40°C SF 1.25//1.00



V		Hz	kW	HP	RPM	A		SFA		PF	IE code	NEMA NOM EFF η 100%/75%/50%
230ΔΔ	460Δ	60	55	75	3555	170	84.8	213	106	0.87	IE3	93.6/93.0/91.7
380Δ	–	50	45	60	2955	82.7	–	82.7	–	0.88	IE3	94.0/92.9/91.7
–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–



MOBIL POLYREX EM (14418h)